



PX6 Series

THERMOPLASTIC LED EXIT UNIT

High Efficiency and Ultra Bright LED's combined with a Low Profile Housing makes the PX6 Series a great value that will provide years of low cost operation.

Construction

High Impact V5 Flame Retardant Thermoplastic

Finishes

Available in White or Black

Illumination

Provided by high output, low power consumption LEDs. 1.5 Watts for Red / 2 Watts for Green

Installation

Complete Universal Mounting for Top, Side, Wall, or Conduit. Shipped complete with 2-Faceplates, 1-Back plate, 1-Snap-On Canopy, 1-Conduit Canopy. Universal K/O's on back plate fit most standard size junction boxes.

Electrical

Field Selectable 120/277 Input Voltage Transformer. Automatic Low Voltage Disconnect (LVD) protects the battery from deep discharge. When normal AC power fails the solid state transfer switch automatically connects to the battery for 3 HOURS of power and is recharged in 24hours.

Features


- Super Bright Low Consumption LED's
- Damp Location Rated
- Energy Star Rated
- Universal Snap In/Out Chevrons

Warranty

Three Year Full Electronics Warranty.
Ten Year Battery Warranty.
(Five Years Full / Five Years Pro-rated)



Dimensions

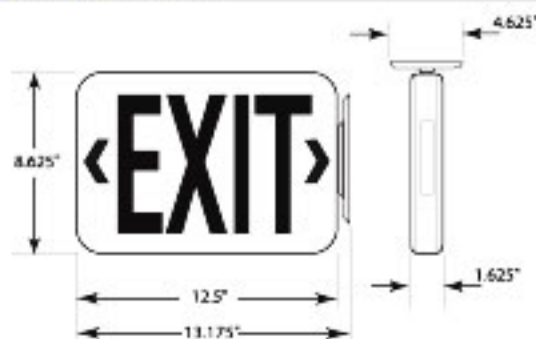

Ordering Information

SERIES	PX6
BATTERY AC ONLY	EM-Battery Backup AC-AC Power Only
LETTER COLOR	R-Red G-Green
UNIT COLOR	W-White B-Black

Example: **PX6-EM-RW**